


Q-Test inter-VLAN connectivity by pinging from a PC in the Insta VLAN to a PC in the Zomato VLAN, and explain why the ping succeeds or fails based on your configuration.

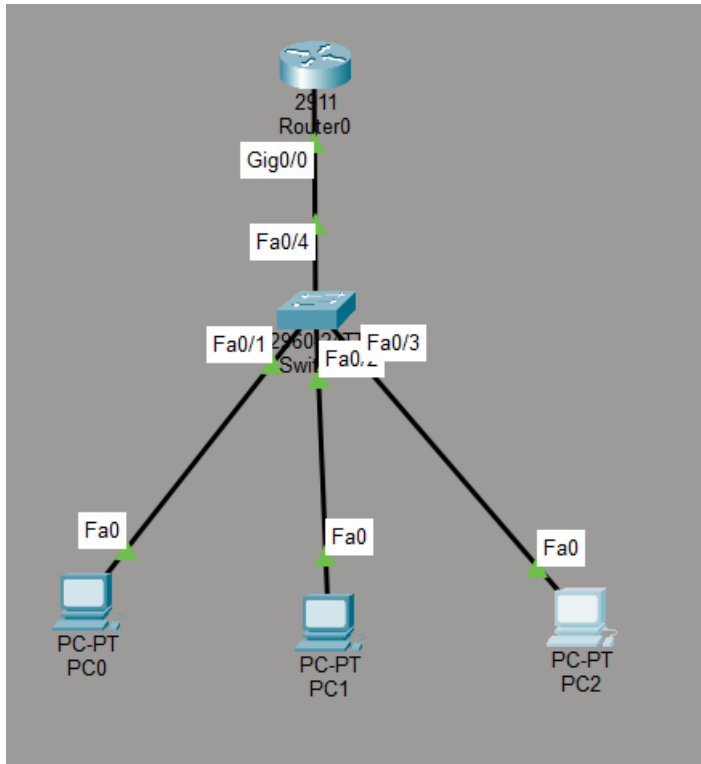

```
Switch#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#int f 0/4
Switch(config-if)#switchport mode trunk
Switch(config-if)#exit
Switch(config)#do wr
Building configuration...
[OK]
Switch(config)#
%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up

Switch(config)#
```

```
Switch#show interfaces trunk
Port      Mode      Encapsulation  Status        Native vlan
Fa0/4     on        802.1q         trunking      1

Port      Vlans allowed on trunk
Fa0/4     1-1005

Port      Vlans allowed and active in management domain
Fa0/4     1,10,20,30

Port      Vlans in spanning tree forwarding state and not pruned
Fa0/4     1,10,20,30

Switch#
```